

DESCRIPTION: 1" FENCE RAIL

TARRIF# 7604.29.10.00



PROPOSAL# 38351-2A

HYDRO 5675 Kennedy Road Mississauga, Ontario L4Z 2H9



DATE

SYM

REVISION

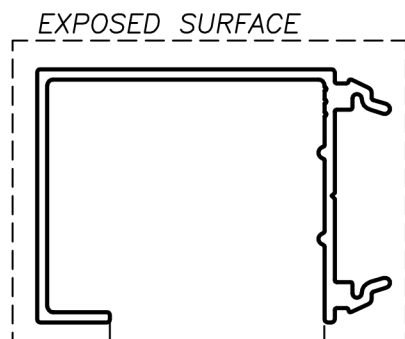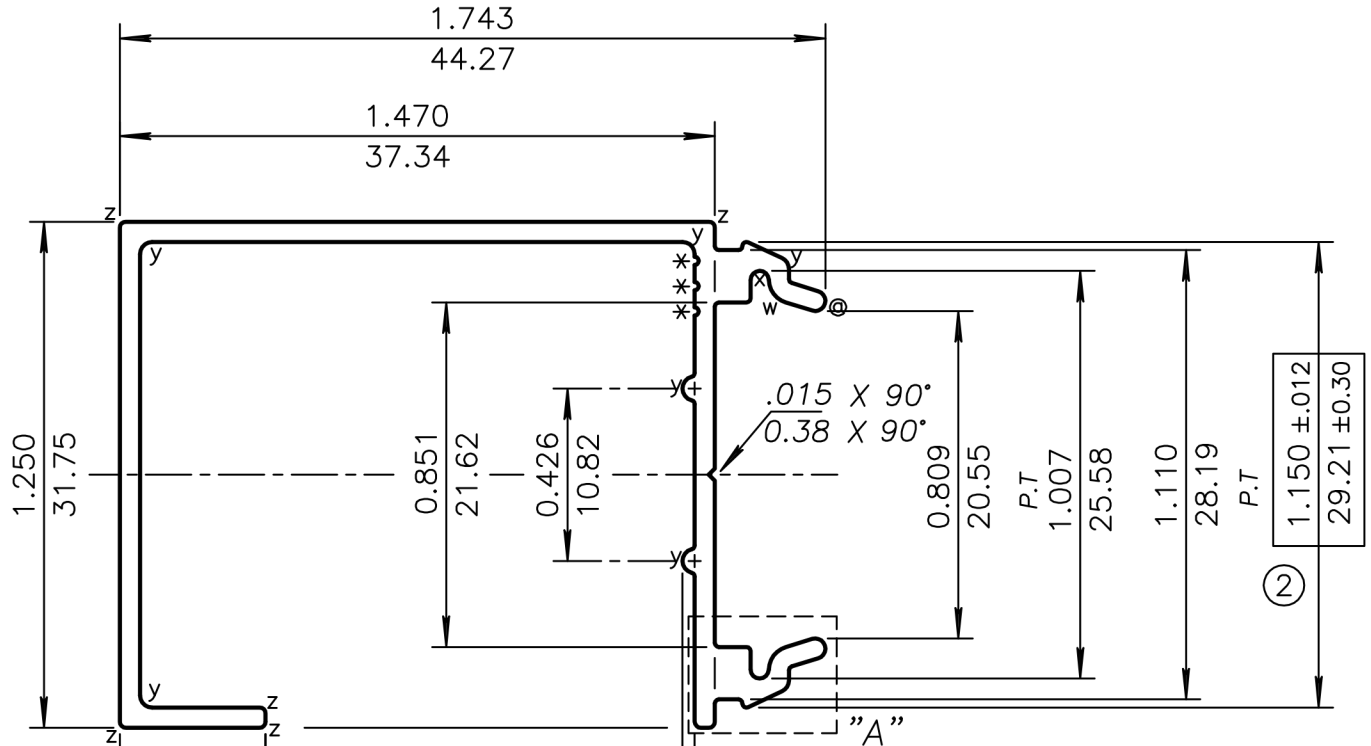

	+ .033	①
1.060	- .013	
26.92	+ 0.84	
	- 0.33	

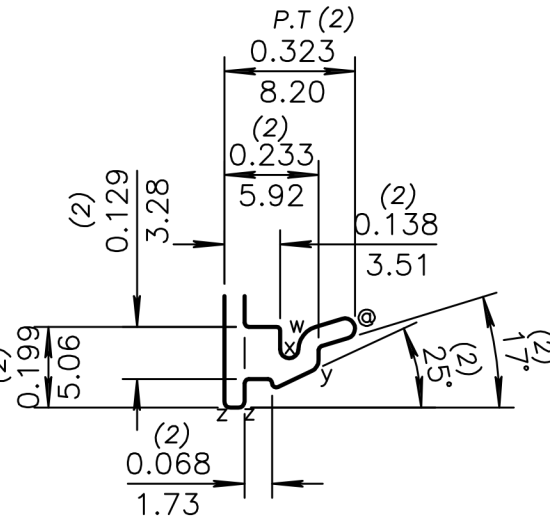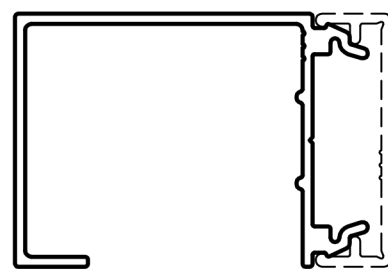

UNMARKED RADII = RADIUS TO SUIT
 BREAK CORNERS = 0.010 (0.25) R.
 (z) = 0.015 (0.38) R. (7)
 (y) = 0.030 (0.76) R. (7)
 (x) = 0.023 (0.57) R. (2)
 (w) = 0.060 (1.52) R. (2)
 (⊙) = FULL R. (2)

(*) = 0.010(0.25) R. X 0.010(0.25)D. HYDRO I.D. MARKS

UNSPECIFIED WALL THICKNESS
 ③0.050(1.27)
 ±0.006(0.15)



EST. AREA	0.259	IN ²	167	MM ²	OUT PER.	—	IN	—	MM
EST. WT.	0.311	LBS/FT.	0.463	KG/M	FACTOR	31			
EST. PER.	9.717	IN	247	MM	C.C.D.	2.046	IN	52	MM
DWN BY	Danica	ALLOY	6063-T6	SCALE	2:1	DATE	09,02,2021		

BREAK ALL CORNERS .016"R (0.41 mm)R UNLESS OTHERWISE NOTED.

STANDARD ALUMINUM ASSOCIATION TOLERANCES TO APPLY UNLESS OTHERWISE SPECIFIED