

PART NO. —

DIE NO.

AS-72417

DASH

1

DESCRIPTION: —

TARRIF# 7604.29.10.00

PROPOSAL# 33445-1C


DATE

SYM

REVISION

NO SURFACES EXPOSED.

PLEASE ALLOW FLATNESS TOLERANCE 0.004" PER 1.000" OF WIDTH

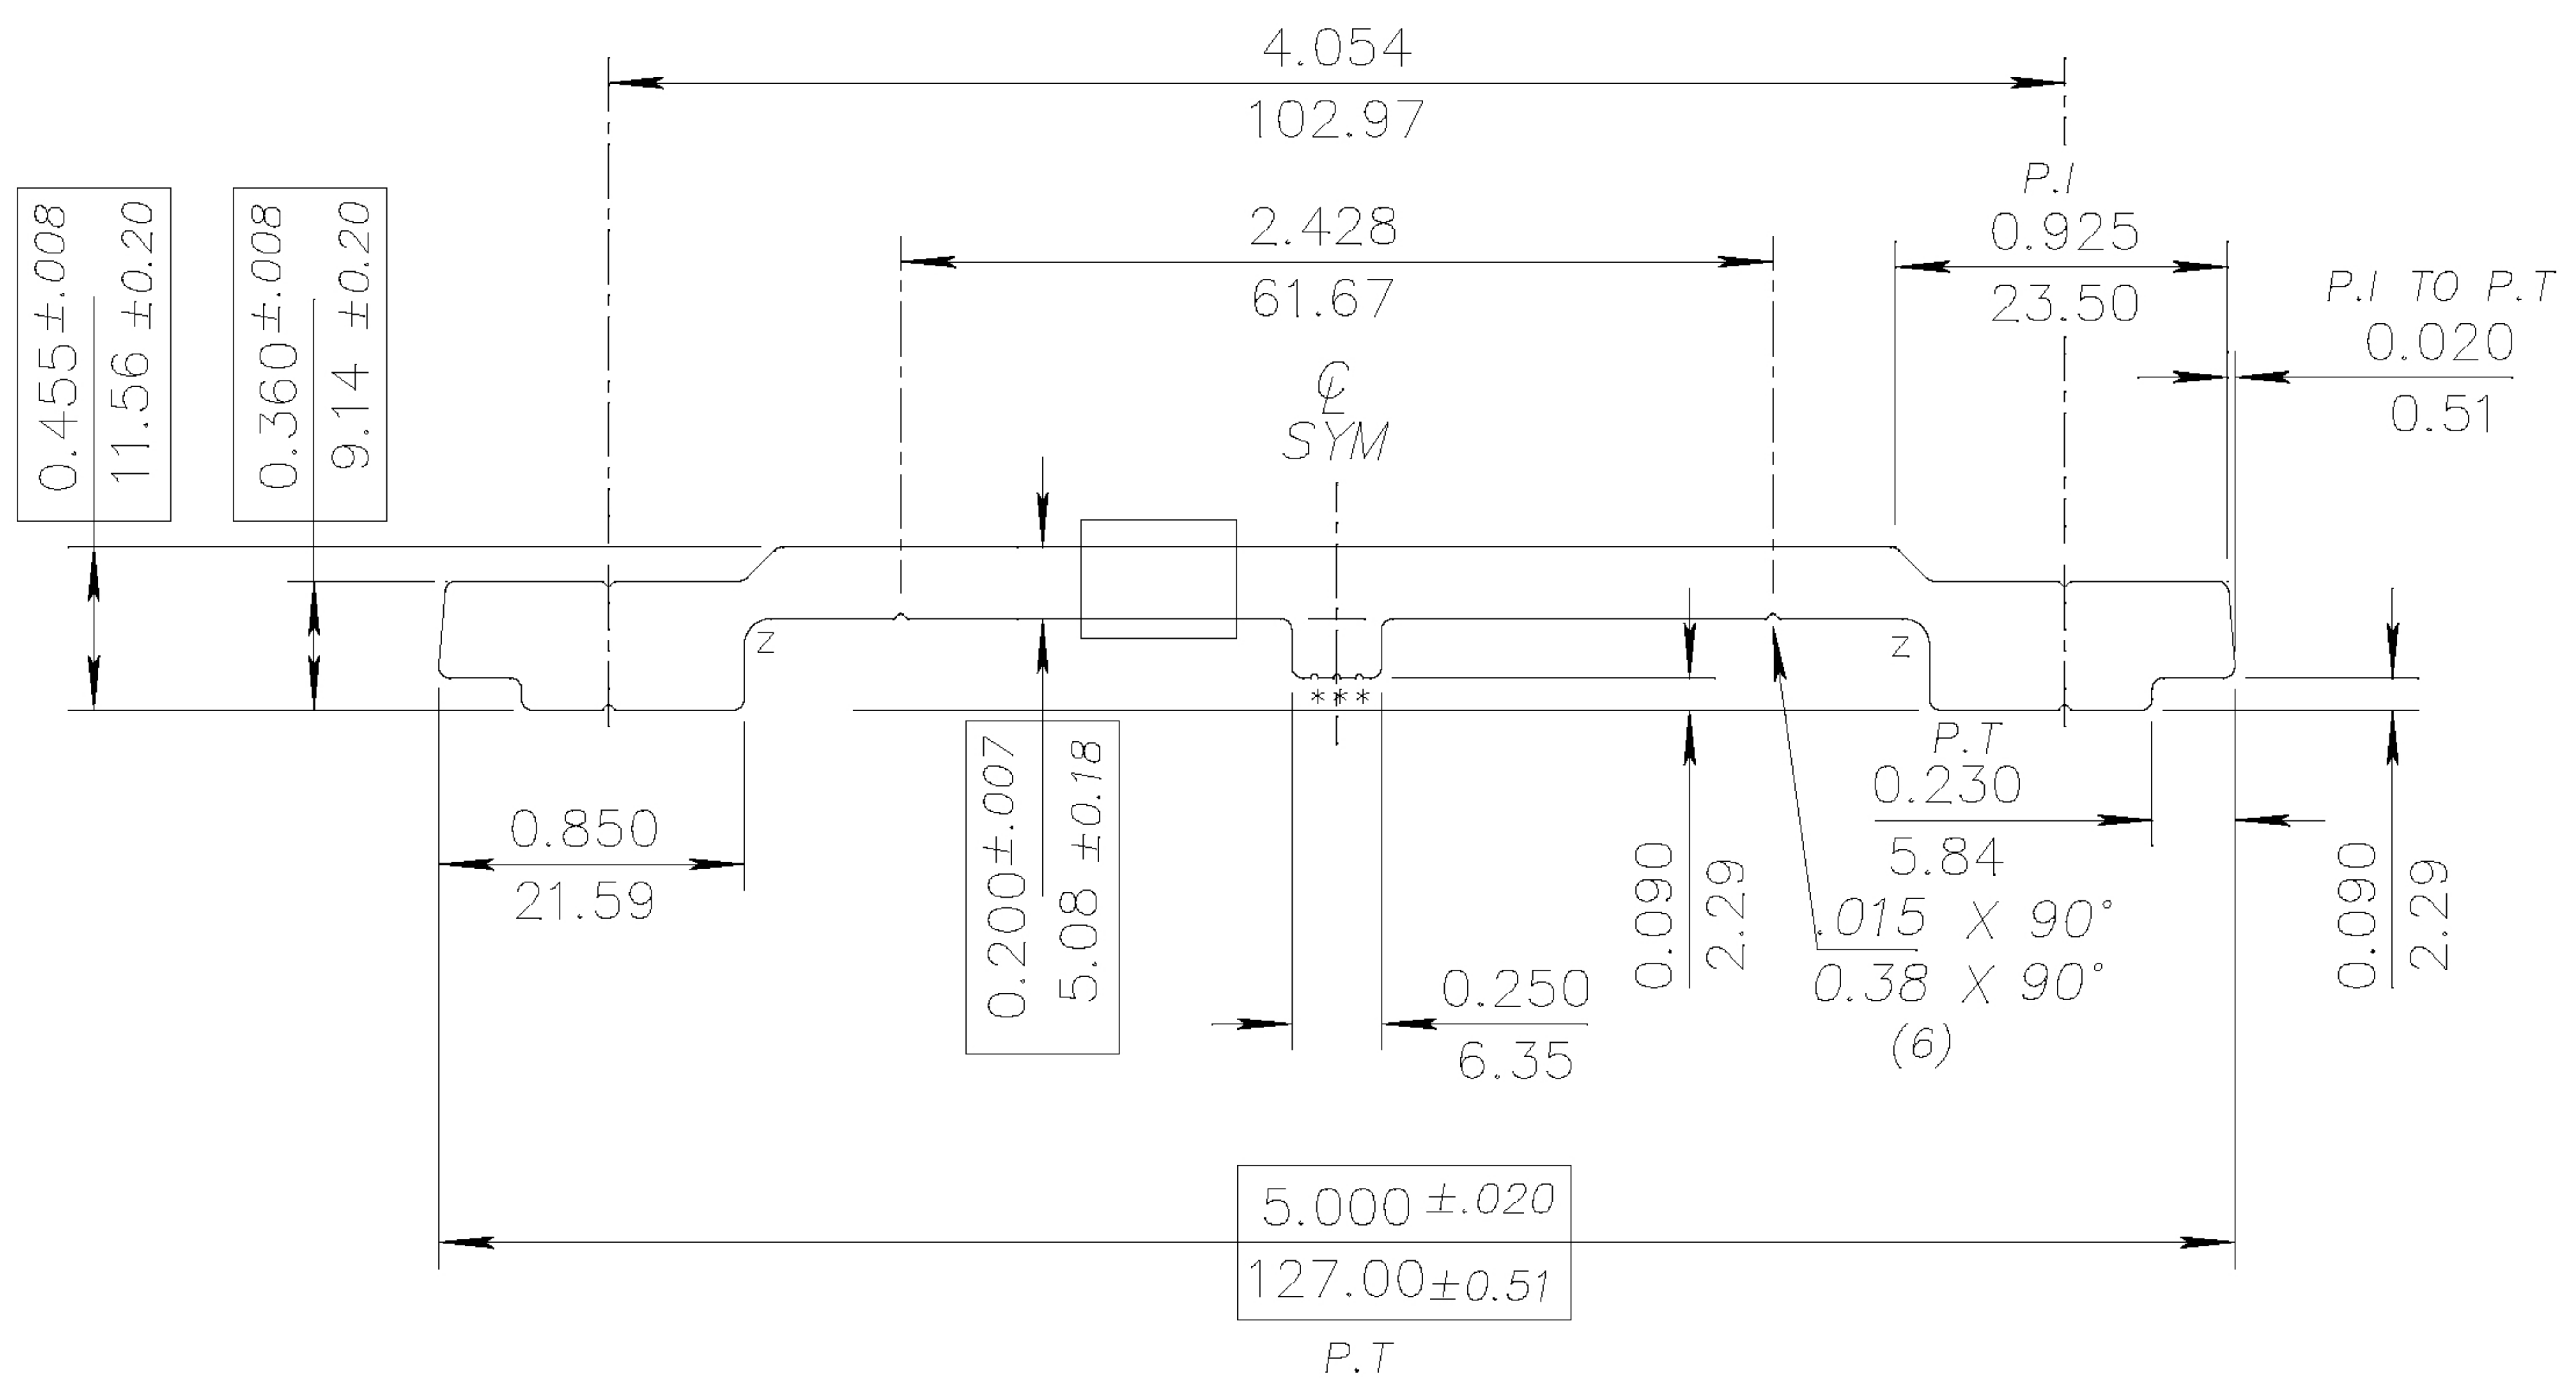

□ = PULL TEST SAMPLE

UNMARKED RADII = RADIUS TO SUIT  
BREAK CORNERS = 0.031 (0.79) R.  
(z) = 0.075 (1.91) R. (2)

(\*) = 0.010(0.25) R. X 0.010(0.25)D.



UNSPECIFIED WALL THICKNESS

A/S

|           |        |                 |         |                 |          |       |          |     |    |
|-----------|--------|-----------------|---------|-----------------|----------|-------|----------|-----|----|
| EST. AREA | 1.257  | IN <sup>2</sup> | 811     | MM <sup>2</sup> | OUT PER. | —     | IN       | —   | MM |
| EST. WT.  | 1.508  | LBS/FT.         | 2.245   | KG/M            | FACTOR   | 8     |          |     |    |
| EST. PER. | 11.451 | IN              | 291     | MM              | C.C.D.   | 5.000 | IN       | 127 | MM |
| DWN BY    | Kim    | ALLOY           | 6061-T6 | SCALE           | 1:1      | DATE  | 16-01-20 |     |    |

BREAK ALL CORNERS .016"R (0.41 mm)R UNLESS OTHERWISE NOTED.

STANDARD ALUMINUM ASSOCIATION TOLERANCES TO APPLY UNLESS OTHERWISE SPECIFIED